



API Key

Most of the API Methods would not work without API Keys set up. API Keys are used to store and use authorization data. To create one perform the following steps:

Go to the **API Providers** (RED MARK) section on the Top Menu of Mobsted platform

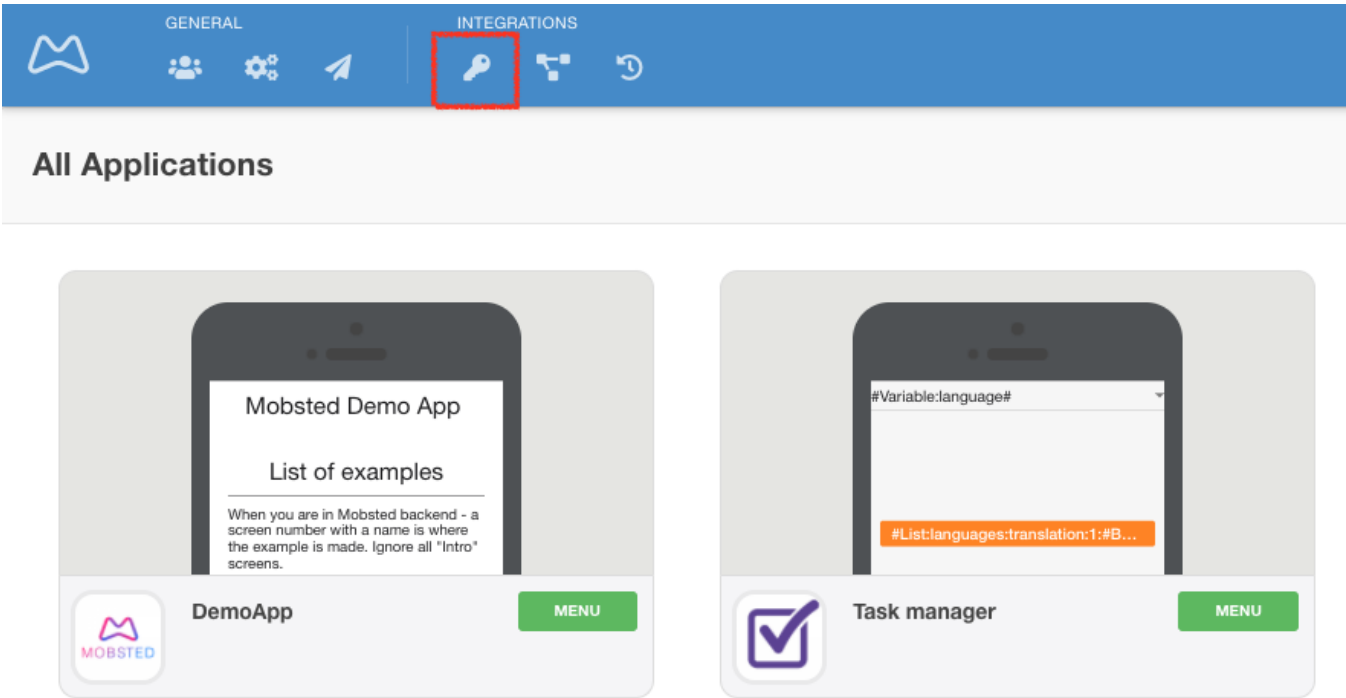

Select API provider, which would store API Keys (RED MARK)

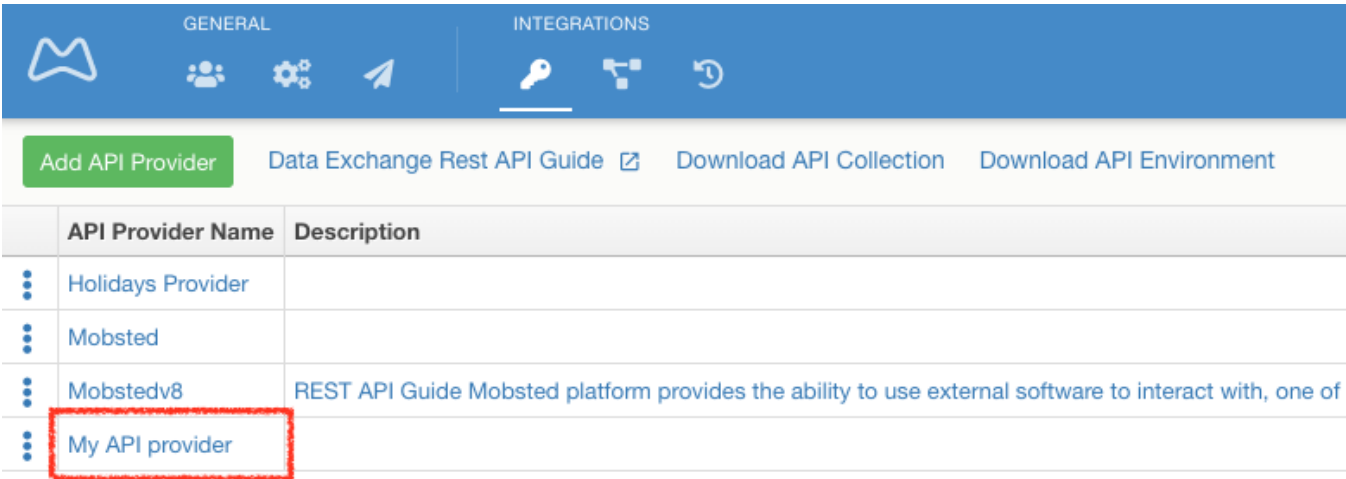

In the window opened navigate to **API keys** tab (RED MARK)

API Provider

Api Provider name

My API provider

Base URL

https://api.mailgun.net

Description

Icon Path

https://i.pinimg.com/originals/79/24/51/79245197d33ad86e96457ef33bf3e9e4.png

Authentication Documentation

Active

OFF ☒ ON

API PROVIDER METHODS

API KEYS

Create New API Key

API Key Name

Click **Create new API Key** (RED MARK)

API Provider

Api Provider name

My API provider

Base URL

https://api.mailgun.net

Description

Icon Path

https://i.pinimg.com/originals/79/24/51/79245197d33ad86e96457ef33bf3e9e4.png

Authentication Documentation

Active

OFF ☒ ON

API PROVIDER METHODS

API KEYS

Create New API Key

API Key Name

Fill in the following fields (RED MARK):

- **Api Key Name** - enter the name of the API Key;
- **Method** - select on of the authentication methods available (Basic, Digest, SAML, WS-Federation, OAuth, OpenID Connect)
- **Key1** - primary key
- **Key2** - secondary key
- **Key3** - 3d key
- **AuthUrl** - URL address to send authentication data

API Key - Create

Api Key Name

Key for my API

Method

Basic

Key1

Key2

Key3

AuthUrl

Close

Save API Key

Click **Save API Key** (RED MARK)

API Key - Create

Api Key Name

Key for my API

Method

Basic

Key1

Key2

Key3

AuthUrl

Close

Save API Key

Click **Close**

